


Range

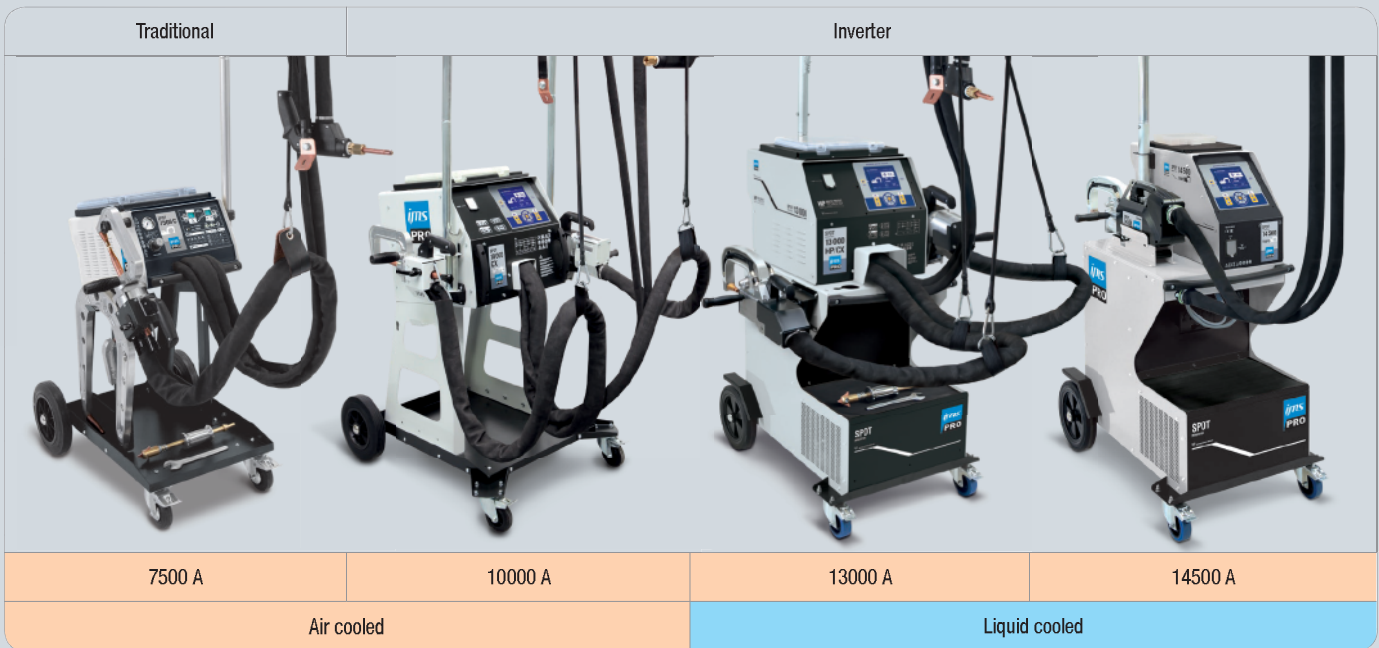

		SPOT 7500	SPOT 10000	SPOT 13000 HP	SPOT 14500 TRAF0
Mild - Doux	< 2.0 mm	■	■	■	■
	> 2.0 mm	■	■	■	■
HSS:VHSS - HLE/THLE	< 2.0 mm	—	■	■	■
	> 2.0 mm	—	■	■	■
UHSS/Boron - UHLE/Bore	< 2.0 mm	—	—	■	■
	> 2.0 mm	—	—	■	■
Number of spots (non-stop : 10/min) - Nombre de points (non-stop : 10/min)	⊕ 0.8 + 0.8 mm	25	30	2000	2000
	⊕ 2.5 + 2.5 mm	7	10	120	120
Inverter technology		—	■	■	■
EMF Directive 2013/35/AE (⚡)		—	—	HP Technology (⚡)	■
Cooling system - Système de refroidissement		Air	Air	Liquid	Liquid
Automated regulation - Régulation automatique	A	—	■	■	■
	daN	—	■	■	■
	∅ spot	Irregular	Constant	Constant	Constant
Mode auto		—	—	C G CX	■
Clamp - Pince	X	—	—	■	—
	C	■	■	■	■
	X + C	—	■	■	—
TRANSFORMER INSIDE		—	—	—	■
Cables ←→		2.5 m	2.5 m	2.5 m	4 m 6 m
Includes gun		■	■	■	option
Fuse	400 V	32 A	32 A	32 A	25 A (14500 A) 16 A (11500 A)
	200 / 208-240 V	—	—	63 A	40 A (14500 A) 32 A (11500 A)