


Inverter & liquid cooled

Not available on stock :

Minimum of quantity **5**

Spot welding

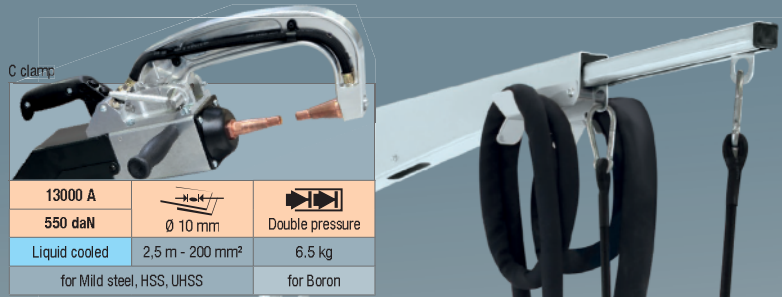

Technologies

STS SPOT TRACEABILITY SOFTWARE

SAVE spot welding configuration and EXPORT data

050914



Technologies

HP HEALTH PROTECT TECHNOLOGY

Electro-magnetic field protection :

5 cm (Norm : 30 cm max) 4 cm (Norm : 30 cm max)


Technologies

EDC ENERGY DYNAMIC CONTROL

Automatic detection of :

- Steel types
- Thickness of metal sheets
- Adhesives
- Insulating material between sheets.

Guarantee for a constant quality of the welding spot.



Minimum of quantity **5**
for HP C, HP X



Product		SPOT 13000 HP C		SPOT 13000 HP X		SPOT 13000 HP CX	
Reference		021303		023376		021297	
50/60 Hz - Fuse		400 V - 3 φ - 32 A (D)		400 V - 3 φ - 32 A (D)		400 V - 3 φ - 32 A (D)	
A I _{RMS}		13000 A		13000 A		13000 A	
F _{max}		550 daN		550 daN		550 daN	
Thickness max		: 3 + 3 + 3 mm	: 1.5 + 3 mm	: 3 + 3 + 3 mm	: 1.5 + 3 mm	: 3 + 3 + 3 mm	: 1.5 + 3 mm
Cooling system		Liquid	Air	Liquid	Air	Liquid	Air
V U ₀		16 V		16 V		16 V	
Dimensions L x l x H		65 x 80 x 205 cm		65 x 80 x 205 cm		65 x 80 x 205 cm	
Weight (product/box)		149 / 160 kg		149 / 160 kg		167.5 / 175.5 kg	
Included		2.5 m 200 mm² + 2.5 m 150 mm² + 2.5 m 150 mm² + + +		2.5 m 200 mm² + 2.5 m 150 mm² + 2.5 m 150 mm² + + +		2.5 m 200 mm² + 2.5 m 150 mm² + 2.5 m 150 mm² + + + +	