

Technologies

FV FLEXIBLE VOLTAGE


85 V 265 V

110 V 230 V

(2.5 mm² max)
100 m



PATENTS REGISTERED NUMBERS
EUROPEAN TRADEMARK & DESIGN

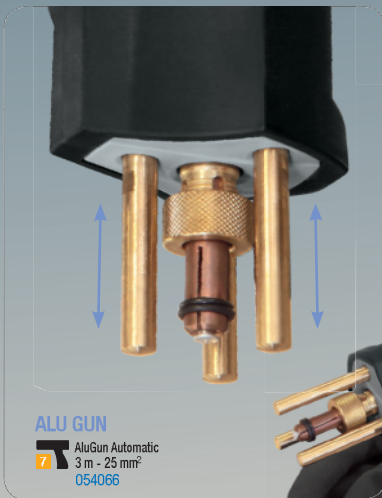


NEW DESIGN
66.000 µF

Options

<p>Fast pulling rings - Anneaux de tirage rapide - Aufsteckzugöse selbstarretierend 058743</p> <p>Rings 058712 (x 5)</p> <p>Alu screws - Goujons alu Ø 4, 5, 6 mm</p>	<p>Included</p> <p>Alu 1 050938</p> <p>Alu 2 050945</p>
<p>Pneumatic alu dust (ATEX) vacuum cleaner - Aspirateur pneumatique pour poussières alu (ATEX) 058866</p> <p>25 L NEW 6 bar 800 L/min 150 m³/h 74 x 45 x 45 cm 18 kg</p>	<p>Included</p> <p>Filter 058873</p> <p>Filter bag 5 kg 058880</p> <p>Slide hammer - Marteau à inertie 380 g 050051</p>
<p>Alu hammers - Marteaux alu - Aluminiumhämmer 020386</p>	<p>Infrared thermometer Thermomètre infrarouge Infrarot Thermometer -50 +380°C / -58 +716°F 052994</p> <p>Blow torch - Lampe à souder - Lötlampe 052741</p>
<p>Alu puller 051003</p>	<p>Thermal marking pencil 121°C / 250°F 052765</p> <p>Novacet Plus (Butane/Propane/Propylene) 380 ml / 220 g 040441</p>

ALU PROCESS



FV

Product	MADE IN FRANCE CE EAC	SPOT ALU FV	COMBISPOT 230 V
Reference		020689	020580
50/60 Hz - Fuse	±AM±	110 < 230 V - 5 A	230 V - 16 A
A I ₂ max		7500 A	Steel : 3800 A / Alu : 7500 A
T Gun		Automatic	Manual + Automatic
V U ₂		50 < 200 V	Steel : 7.4 V / Alu : 20 < 200 V
A I _{RMS}		—	Steel : 2800 A
W Power		0.65 kW	20 kW
Car body parts			
Dimensions L x I x H		21 x 24 x 36 cm	45 x 43 x 29 cm
Weight (product/box)		12.5 / 13.5 kg	43.5 / 47.5 kg
Included		Alu Automatic 3 m - 25 mm² + Alu box Standard	Steel Manual 2 m - 70 mm² + Steel Automatic 3 m - 50 mm² AluGun Automatic 3 m - 25 mm² + 2 m 70 mm² Spotter box PRO + Alu box Standard