

# 9336AX ÷ 9340AX


**27**  
**ATEX** **Ex**  
II 2G c T6



**Aluminium**

**2500 mm**  
**Inox**

**2 ÷ 14 Kg**

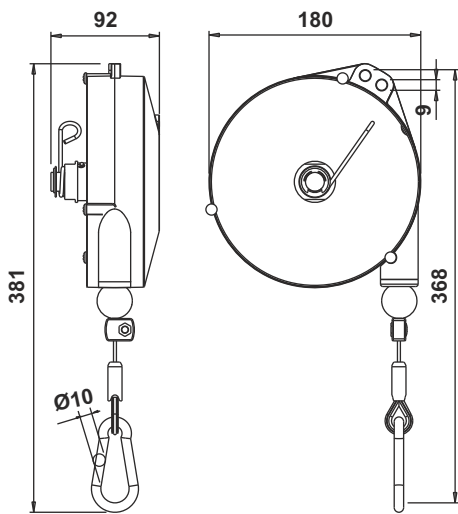

Item

9336AX 9337AX 9338AX 9339AX 9340AX



2÷4 4÷6 6÷8 8÷10 10÷14

**Kg**

3,14 3,30 3,36 3,43 3,58

# 9346AX ÷ 9350AX

**28**  
**ATEX** **Ex**  
II 2G c T6




**STOP**

**Aluminium**

**2500 mm**  
**Inox**

**2 ÷ 14 Kg**

In addition to the features of the former range, the new balancers are equipped with a new device enabling to stop the stroke by carrying out a simple operation on the load.

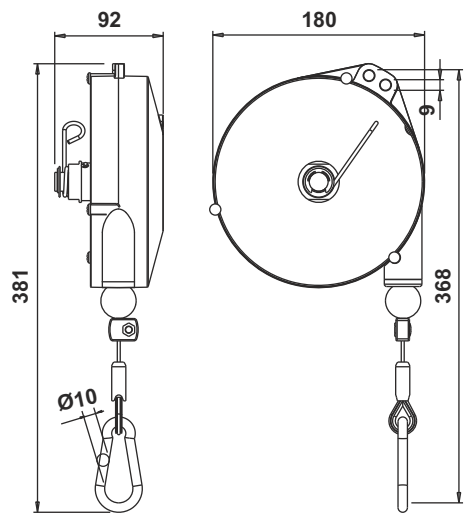

Item

9346AX 9347AX 9348AX 9349AX 9350AX



2÷4 4÷6 6÷8 8÷10 10÷14

**Kg**

3,14 3,32 3,38 3,48 3,62